


MULTIPROCESSOR HCM 700; HCM 800 (-M, -C, -S)

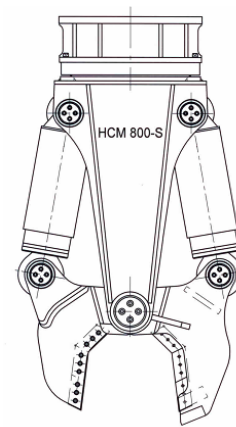

A single support can be equipped with three different, rapidly exchangeable jaws:

- HCM-M multi-function jaw
- HCM-C combi-jaw
- HCM-S scrap metal jaw

HCM STRENGTHS

- Rapidly exchangeable jaws using the QCHC system (optional)
- Hydraulically 360° rotatable
- Highly reliable GEROTOR hydraulic motor, with a pressure limit valve
- Robust hydraulic cylinder with integrated SPEED-Valve
- Short cycle-times due to the integrated SPEED-Valve
- Reinforced jaws manufactured from high-strength, wear-resistant HARDOX steel
- Exchangeable crushing teeth made of Hardox 600
- High closing force and wide jaw opening

Modell:	HCM 700-M	HCM 700-C	HCM 700-S	HCM 800-M	HCM 800-C	HCM 800-S
Weights:						
Excavator weight:	17-28 t	17-28 t	17-28 t	25-40 t	25-40 t	25-40 t
Weight:	2250 kg	2100 kg	2000 kg	3230 kg	2995 kg	2850 kg
Dimensions, Closing forces:						
Opening:	670 mm	850 mm	480 mm	775 mm	1000 mm	560 mm
Jaw width:	390 mm	230 mm	230 mm	500 mm	250 mm	250 mm
Jaw depth:	670 mm	680 mm	440 mm	750 mm	750 mm	510 mm
Closing force: (min. max.)	80/270 to	80/270 t	80/270 t	100/370 to	100/370 t	130/370 t
Hydraulik:						
Opening / Closing: Pmax.	380 bar	380 bar	380 bar	380 bar	380 bar	380 bar
Oil Flow:	130-220 l/min	130-220 l/min	130-220 l/min	180-260 l/min	180-260 l/min	180-260 l/min
Rotation: Pmax.	140 bar	140 bar	140 bar	140 bar	140 bar	140 bar
Oil flow:	40 l/min	40 l/min	40 l/min	40 l/min	40 l/min	40 l/min